


thermo Sphere

Electric Oil Filled Radiators

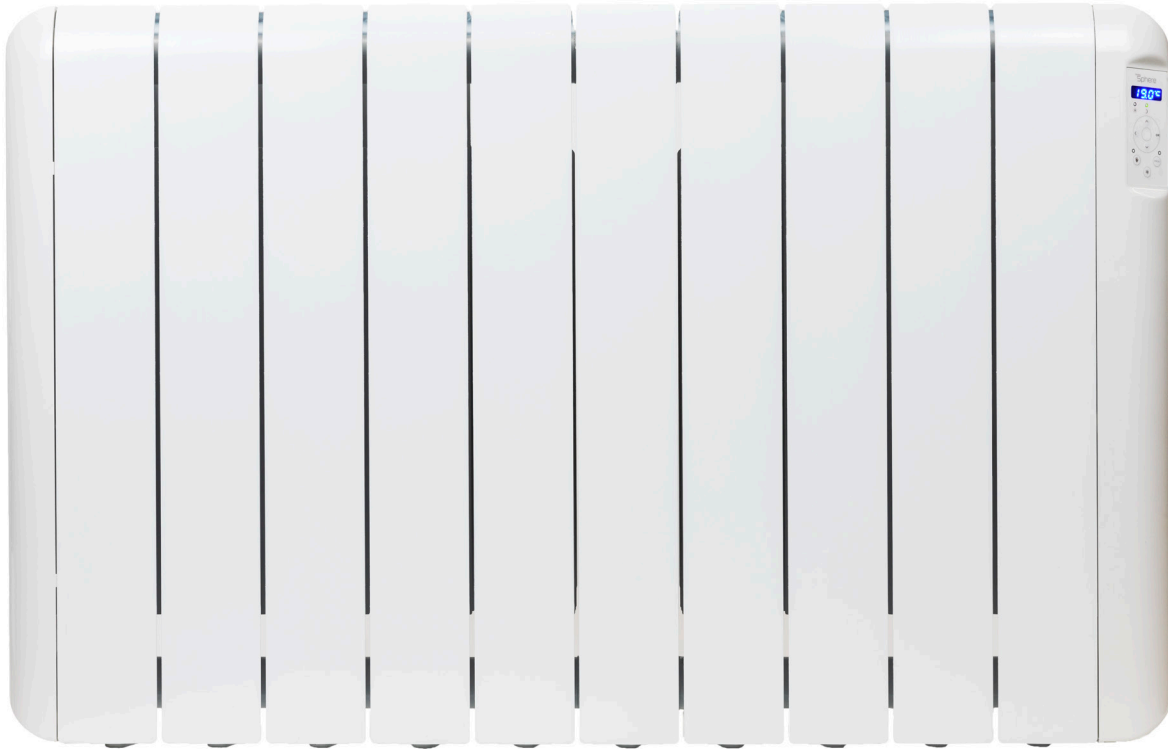

Programmable oil filled electric radiators are accurate with fast acting control. 23% more efficient than a panel heater thanks to the high thermal inertia fluid and intelligent thermostatic control

- Electronic thermostat with LCD display
- 7 day programmable heating schedule
- Manual temperature setting
- Open window and optimum start
- Efficient thermal fluid
- Aluminium body
- Built in energy monitor

Technical data

Voltage 230V AC 50Hz

IEC protection Class I

Protection rating IP24

Cable length 1.1m (white)

Wiring connection UK plug

Warranty 10 years


thermo Sphere

Available sizes and outputs

Stock Code	Output (W)	BTU/h	Amps (A)	Max area (m ²) Good Insulation	Max area (m ²) Poor Insulation	Weight (Kg)	Colour
TSR-0600	600	2046	2.6	7	6	11	White
TSR-0900	900	3069	3.9	10	9	13	White
TSR-1200	1200	4092	5.2	13	12	15	White
TSR-1500	1500	5115	6.5	17	15	17	White
TSR-1800	1800	6138	7.8	20	18	21	White

Mounting dimensions

Model	W (mm)	H (mm)	W1 (mm)	H1 (mm)
TSR-0600	435	580	159	246
TSR-0900	595	580	319	246
TSR-1200	750	580	478	246
TSR-1500	912	580	638	246
TSR-1800	1070	580	638	246

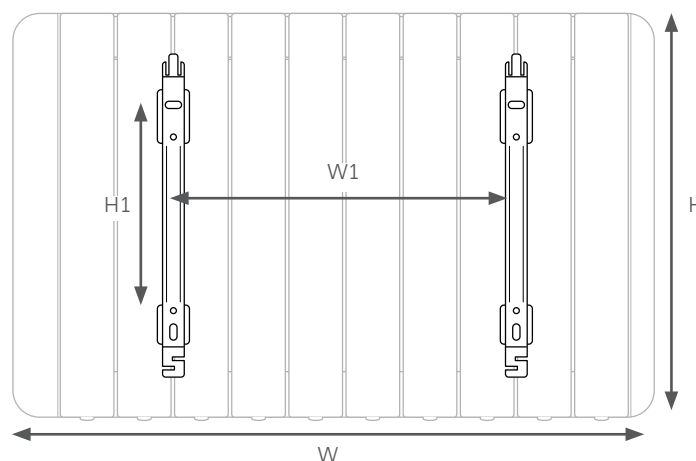

Anatomy of a convector panel heater

- The aluminium heating fins conduct the heat away from the element and oil and are shaped to aid the convection heating effect.
- Digital controls are on the right hand side of the top panel.
- The power switch is in the middle of the right hand side panel.
- The cable is situated at the bottom of the right hand side panel.
- The ambient temperature sensor is at the bottom of the right hand side panel.

